



PUB-NO: EP001459829A1
DOCUMENT-IDENTIFIER: EP 1459829 A1
TITLE: Method of build up welding to thin-walled
portion
PUBN-DATE: September 22, 2004

INVENTOR-INFORMATION:

NAME	COUNTRY
SATO, AKIHIRO	JP
ISHIKAWA, KIYOFUMI	JP
MIYAZAWA, HIROYUKI	JP
YAMAOKA, HIROTO	JP
AOKI, YASUHIRO	JP

ASSIGNEE-INFORMATION:

NAME	COUNTRY
ISHIKAWAJIMA HARIMA HEAVY IND	JP
ISHIKAWAJIMA INSPECTION & INST	JP

APPL-NO: EP03019773

APPL-DATE: August 29, 2003

PRIORITY-DATA: JP2003077247A (March 20, 2003)

INT-CL (IPC): B23K009/04, B23K009/038 , B23K037/06 , B23P006/04

EUR-CL (EPC): B23K009/038 ; B23K009/04, B23K037/06

ABSTRACT:

CHG DATE=20040928 STATUS=O>A recess formed in close contact with a thin-walled portion 3a of a workpiece to store molten metal at a surfaced portion, a jig 4 manufactured from a material with a higher heat-resisting temperature than that of the molten metal and a satisfactorily large heat capacity, a step (A) wherein the jig is installed on the workpiece, a preheating step (B) in which the workpiece and the jig are preheated

to a
predetermined temperature under the condition that jig 4 is
installed, a build
up welding step (C) for build up welding the thin-walled portion of
the
workpiece and forming weld beads at surfaced portion, and a jig-
removing step
(D) for removing the jig after weld beads solidify completely.



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 459 829 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.09.2004 Bulletin 2004/39

(51) Int Cl.7: B23K 9/04, B23K 9/038,
B23K 37/06, B23P 6/04

(21) Application number: 03019773.5

(22) Date of filing: 29.08.2003

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(30) Priority: 20.03.2003 JP 2003077247

(71) Applicants:
• Ishikawajima-Harima Heavy Industries Co., Ltd.
Chiyoda-ku, Tokyo 100-8182 (JP)
• Ishikawajima Inspection & Instrumentation Co.,
Ltd.
Shinagawa-ku, Tokyo 140-0014 (JP)

(72) Inventors:
• Sato, Akihiro
Yokohama-shi Kanagawa (JP)

• Ishikawa, Kiyofumi
Hiratsuka-shi Kanagawa (JP)
• Miyazawa, Hiroyuki
Yokohama-shi Kanagawa (JP)
• Yamaoka, Hiroto
Yokohama-shi Kanagawa (JP)
• Aoki, Yasuhiro
c/o Ishikawajima-Harima Heavy Ind.
Chiyoda-ku Tokyo (JP)


(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Method of build up welding to thin-walled portion

(57) A recess formed in close contact with a thin-walled portion 3a of a workpiece to store molten metal at a surfaced portion, a jig 4 manufactured from a material with a higher heat-resisting temperature than that of the molten metal and a satisfactorily large heat capacity, a step (A) wherein the jig is installed on the work-

piece, a preheating step (B) in which the workpiece and the jig are preheated to a predetermined temperature under the condition that jig 4 is installed, a build up welding step (C) for build up welding the thin-walled portion of the workpiece and forming weld beads at surfaced portion, and a jig-removing step (D) for removing the jig after weld beads solidify completely.

Fig.5

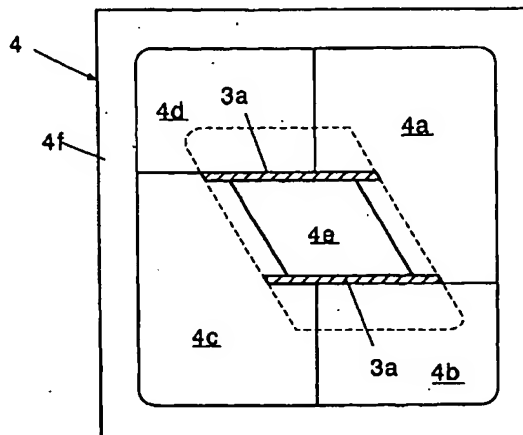

EP 1 459 829 A1

Description

BACKGROUND OF THE INVENTION

5 **Technical Field of the Invention**

[0001] The present invention relates to a method of build up welding to a thin-walled portion, and more particularly, a method repairing the tip portion of a moving blade of a gas turbine.

10 **Description of the Related Art**

[0002] Fig. 1 is a general external view showing a moving blade of a turbine. The moving blade is composed of blade portion 1, dovetail portion 2, and tip portion 3. Blade portion 1 has a blade-shaped section and generates rotational power from combustion gas. Dovetail portion 2 is located at an end of the blade portion 1, is fixed at a turbine disk not illustrated, and transmits rotational power to the turbine disk. The tip portion 3 has a thin-walled portion 3a that extends in the rotating direction. The tip of the tip portion 3 reduces leakage of gas as it closely faces the inner surface of the casing.

[0003] The moving blade of a gas turbine, with which high temperature and high pressure combustion gas collides, operates under very severe conditions. Consequently, thick-walled portion 3a at the tip of the moving blade may be subject to erosion of the wall or cracking due to abrasion and high temperature oxidation during operation. In such a case, the thin-walled portion is repaired by build up welding.

[0004] Conventional means of build up welding are already disclosed in patent references 1 and 2.

[Patent Reference 1]

25 Unexamined Japanese patent publication No. 171682, 1995

[Patent Reference 2]

30 Unexamined Japanese patent publication No. 180442, 1998

[0005] "Method of build up welding surface corner and build up welding jig" of Patent Reference 1 is shown in Fig. 2; before beginning the build up welding treatment, a build up welding jig 51 for cooling is placed in close contact with the corner surface side 53a of a welding workpiece 53, then build up welding is performed on the corner surface side 53b, and after weld beads 54 solidify, the build up welding jig 51 is detached from the welding workpiece 53.

[0006] "Method of repairing gas turbine blade" of Patent Reference 2 is shown in Fig. 3; when the tip of a gas turbine blade is repaired by build up welding, gas or fluid is passed through a ventilation hole inside the moving blade, during the repair operation. In Fig. 3, 61 represents the moving blade of a gas turbine, 63 build up welding portion, 64 the nozzle of a welding torch, 65 a welding electrode, 66 an arc, 68 an injection port of the gas or fluid, and 69 the gas or fluid.

[0007] Conventionally, a gas turbine moving blade is made mainly of a Ni base alloy. Such an Ni base alloy has a high tensile strength and extensibility, so one of its advantages is that defects are seldom produced as a result of the aforementioned build up welding.

[0008] Recently, on the other hand, studies and practice have led to a metal with a specific gravity smaller than that of the Ni base alloy (for instance, TiAl alloy) being used for gas turbine moving blades to improve the performance of the gas turbine. The specific gravity of the TiAl alloy is about one half that of the Ni base alloy, and is provided with higher toughness, so when TiAl alloy is used for gas turbine moving blades, the centrifugal force applied to the turbine disk by the moving blades installed can be sharply reduced and the gas turbine can rotate at a higher speed, which are advantages.

[0009] Table 1 compares the characteristics of the Ni base alloy and the TiAl alloy.

50

55

Table 1

Alloy	Code Name	Composition (Wt%)	Specific gravity (g/cm ³)	Tensile strength (MPa)	Specific toughness (10E3m)	Extensibility (%)
Ni base alloy	IN100	Ni-9.5Cr-15Co-3Mo-4.8Ti-5.5Al-0.015B-0.95V-0.06Zr	7.75	1014	13	5
TiA1 alloy	K5C	Ti-31.2Al-7.0Nb-2.6Cr-1.4W-0.27B-0.06C	4	683	17	0.9

[0010] However, if build up welding is applied for a thin-walled portion in the same way as conventional methods, with moving blades made of TiA1 alloy for the gas turbine, as shown in Figs. 4A and 4B, there are problems such as molten metal dripping from a corner portion of thin-walled portion 3a and a dull corner portion.

[0011] To solve these problems, if a cooled jig is installed at the corner surface side as shown in Patent Reference 1, because of the small amount of extensibility and low tensile strength of TiA1 alloy, there is a problem in that a weld crack is created by thermal stress at build up welding metal 5.

[0012] In Figs. 4A and 4B, a and b show dull portion and weld crack portion, respectively.

SUMMARY OF THE INVENTION

[0013] The present invention aims to solve these problems. More explicitly, an object of the present invention is to provide a method of build up welding to a thin-walled portion, whereby the thin-walled portion is composed of a material with a small amount of extensibility and a low tensile strength, and with neither drops of molten metal nor a dull corner, can be surface welded with the preferred result.

[0014] The present invention provides a method of build up welding to the thin-walled portion, comprised of a jig-mounting step (A), whereby the jig made of a material with a satisfactorily large heat capacity and higher heat-resistant temperature than the metal to be melted is installed at a thin-walled portion of a workpiece to form a recess that makes close contact with the thin-walled portion of the workpiece and stores the molten metal at a surfaced portion,

a preheating step (B), whereby the workpiece and the jig are preheated to a predetermined temperature under the condition with the jig installed,

next, a build up welding step (C), whereby the thin-walled portion of the workpiece is build up welded, and weld beads are formed at the surfaced portion, and

next, a jig-removing step (D), in which the jig is removed after the weld beads have solidified.

[0015] According to a preferred embodiment of the present invention, the jig manufactured with the material having a sufficiently large heat capacity is a ceramic jig.

[0016] Also, the jig made of a material with a satisfactorily large heat capacity has a sufficiently large heat capacity to reduce the cooling speed of the thin-walled portion after build up welding.

[0017] In addition, the jig manufactured with a material having a satisfactorily large heat capacity is composed of a plurality of closely fitting segments shaped so as to make close contact with the thin-walled portion of the workpiece, and an outer-frame segment that encloses the plurality of closely fitting segments and holds the segments together.

[0018] It is preferred that the material of the workpiece is a TiA1 alloy.

[0019] Preferably, the thin-walled portion of the workpiece is the tip portion of a turbine blade.

[0020] According to the above-mentioned method of the present invention, because the heat-resistant temperature of the jig made of a material with a satisfactorily large heat capacity is higher than the heat-resistant temperature of the molten metal and the recess is formed close to the thin-walled portion of the workpiece to store the molten metal, the recess plays the role of a casting die for the molten metal, so drops of molten metal and dull corners can be prevented from being produced, and a preferred shape of the molten metal can be created.

[0021] In addition, the jig provides a high heat-holding effect because the jig has a satisfactorily large heat capacity and fits closely to the thin-walled portion of the workpiece.

[0022] Also, because the workpiece and the jig are preheated to a predetermined temperature under a condition in which the jig is installed and the jig is removed after weld beads have completely solidified, the cooling rate at the thin-

walled portion after build up welding can be reduced and heat stresses produced can be decreased, so even if the material may otherwise be easily cracked after welding, the material can be surfaced without actually being cracked.
[0023] Other objects and advantages of the present invention are revealed according to the following description referring to the attached drawings.

BRIEF DESCRIPTION OF DRAWINGS

[0024]

- Fig. 1 is a sketch of a moving blade of a turbine.
 Fig. 2 shows a conventional build up welding means.
 Fig. 3 is another conventional build up welding means.
 Figs. 4A and 4B show the results of conventional build up welding.
 Fig. 5 is a structural view of a ceramic jig according to the present invention.
 Fig. 6 is a sketch of the method of the present invention.
 Figs. 7A and 7B show the results of build up welding according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

- [0025]** Preferred embodiments of the present invention are described referring to the drawings. Common portions in each drawing are identified with the same numbers, without duplicating descriptions.
- [0026]** Fig. 5 is a structural view of a ceramic jig used according to the present invention. As shown in Fig. 5, ceramic jig 4 is composed of a plurality (5 in this example) of closely fitting segments 4a to 4e and an outer-frame segment 4f.
- [0027]** Each closely fitting segment 4a to 4e is shaped to closely fit thin-walled portions 3a (hatched portions) of a workpiece (in this example, the tip portion of a turbine blade). Also, the inner surface of the outer-frame segment 4f encloses plurality of the closely fitting segments 4a to 4e and holds the segments in an integrated manner.
- [0028]** The ceramic jig 4 is made of a ceramic with a higher heat-resistant temperature than the heat-resistant temperature of the molten metal. Each closely fitting segment is planar and thicker than the thin-walled portion, and forms a recess that stores molten metal at a surfaced portion. Moreover, the ceramic jig 4 is devised to have a satisfactorily large heat capacity in its entirety to reduce the temperature-cooling rate of the thin-walled portion after build up welding is completed.
- [0029]** Fig. 6 is a typical view showing the method of the present invention.
- [0030]** The build up welding method according to the present invention is comprised of jig-mounting step (A), preheating step (B), build up welding step (C), and jig removing step (D).
- [0031]** As shown in Fig. 6, in jig-mounting step (A), ceramic jig 4 is closely fitted to thin-walled portion 3a of the workpiece, and is installed so that there is a recess that stores molten metal in a portion to be surfaced.
- [0032]** In preheating step (B), the workpiece and the ceramic jig are preheated to a predetermined temperature under the condition in which ceramic jig 4 has been installed. This predetermined temperature is an appropriate preheating temperature for the material of the workpiece. For example, for a TiAl alloy, the temperature should not be less than 800°C or more than 1,000°C. In such a preheating process, the workpiece should be heated uniformly using a heating furnace etc.
- [0033]** Next, in build up welding step (C), a thin-walled portion of the workpiece is build up welded, and weld beads are formed at the surfaced portion. The preferred material used for build up welding is the same as the material of the workpiece. However, if weldable, a different material can also be used. The preferred build up welding method is arc welding, but another means of welding, such as TIG welding can also be employed.
- [0034]** In the next jig removing step (D), jig 4 is removed from the workpiece after weld beads have completely solidified. In this step, in the case of the ceramic jig 4 shown in Fig. 5, the outer-frame segment 4f is slid over the inner surface and is removed, then each closely fitting segment 4a to 4e is separated from the thin-walled portion of the workpiece, thereby the jig can be easily removed.
- [0035]** Figs. 7A and 7B show results of build up welding according to the present invention. Fig. 7A is a view of an end surface of tip portion 3, while Fig. 7B stereoscopically shows the tip portion 3. This example relates to a turbine blade made of a TiAl alloy, wherein one of the thin-walled portions at the tip is surfaced by an arc-welding method using the same material as that of the workpiece. The actual preheating temperature is 900°C.
- [0036]** Obviously, by comparing Figs. 7A and 7B with Figs. 4A and 4B (conventional example), the build up welding method according to the present invention was confirmed to be capable of offering the preferred build up welding without drops of molten metal or dull corners.
- [0037]** As described above, according to the method of the present invention, because the heat-resisting temperature of ceramic jig 4 is higher than that of the molten metal and the jig makes close contact with the thin-walled portion 3a

of the workpiece and a recess is formed to store the molten metal at a surfaced portion, the recess plays the role of a casting die for the molten metal, while suppressing drops of molten metal and dull corners, so the preferred shape of the workpiece can be manufactured.

[0038] As the ceramic jig 4 has a satisfactorily large heat capacity and closely fits the thin-walled portion 3a of the workpiece, a high temperature-holding effect is provided.

[0039] Furthermore, because the workpiece and the ceramic jig are preheated to a predetermined temperature and the jig is removed after weld beads have solidified completely under the condition in which the ceramic jig 4 is still installed, the cooling rate of the thin-walled portion 3a can be reduced after completion of build up welding and thermal stresses produced are reduced, so even if the material can otherwise crack easily after welding, it can be surfaced actually without cracks.

[0040] As described above, the method of build up welding to a thin-walled portion according to the present invention provides advantageous effects, for example, the thin-walled portion composed of a material whose extensibility is small and tensile strength is low can be surfaced advantageously without producing drops of molten metal or dull corners.

[0041] Although the present invention is described referring to a plurality of preferred embodiments, the scope of rights covered by the present invention should not be understood to be limited only to these embodiments. Rather, the scope of rights according to the present invention should include all modifications, corrections, and equivalent entities specified in the attached claims.

Claims

1. A method of build up welding to a thin-walled portion of a workpiece, comprising;
 - a jig-mounting step (A) for installing a jig to the thin-walled portion of the workpiece to form a recess, wherein the jig is manufactured from a material with a higher heat-resisting temperature than the heat-resisting temperature of the molten metal and a satisfactorily large heat capacity, and the recess is to store the molten metal in a surfaced portion in the vicinity of the thin-walled portion of the workpiece,
 - a preheating step (B) for preheating the workpiece and the jig to a predetermined temperature under the condition with the jig installed,
 - a build up welding step (C) for continually build up welding to the thin-walled portion of the workpiece and forming weld beads on a surfaced portion, and
 - a jig-removing step (D) for removing the jig after the weld beads solidify completely.
2. The method of build up welding the thin-walled portion of a workpiece, specified in Claim 1, wherein the jig manufactured from the material with a satisfactorily large heat capacity comprises a ceramic jig.
3. The method of build up welding to the thin-walled portion of a workpiece, specified in Claim 1, wherein the jig manufactured from the material with a satisfactorily large heat capacity has a satisfactorily large heat capacity to reduce the cooling rate at the thin-walled portion after the build up welding process.
4. The method of build up welding to the thin-walled portion of a workpiece, specified in Claim 1, wherein the jig manufactured from the material with a satisfactorily large heat capacity comprises a plurality of closely fitting segments shaped to make close contact with the thin-walled portion of the workpiece, and an outer-frame segment that encloses and holds the plurality of the closely fitting segments in an integrated manner.
5. The method of build up welding to the thin-walled portion of a workpiece, specified in Claim 1, wherein the material of the workpiece is a TiAl alloy.
6. The method of build up welding the thin-walled portion of a workpiece, specified in Claim 1, wherein the thin-walled portion of the workpiece is the tip of a turbine blade.

Fig.1
Prior Art

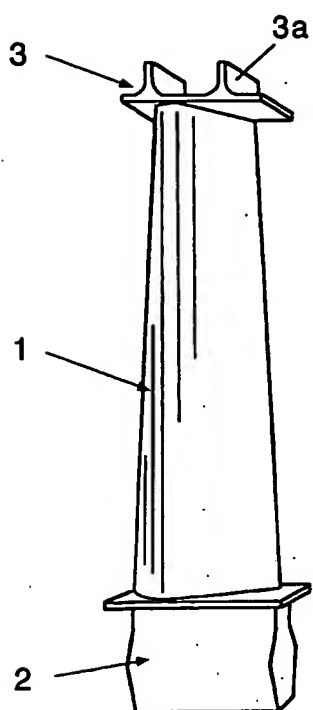


Fig.2
Prior Art

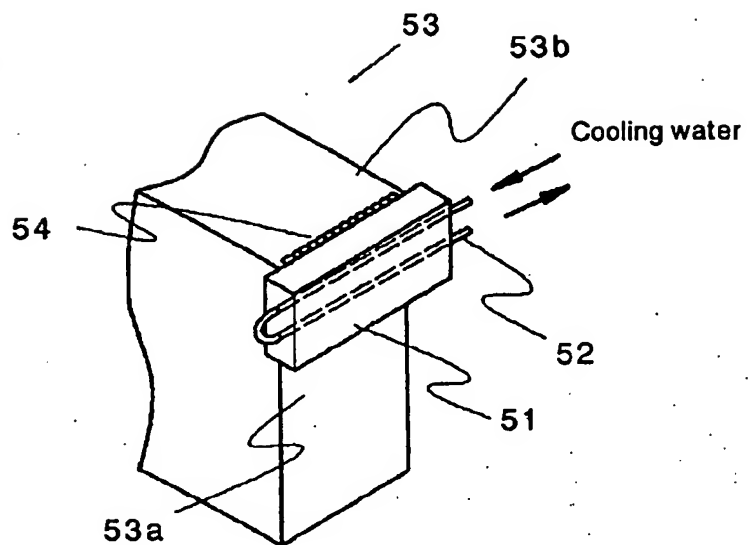


Fig.3
Prior Art

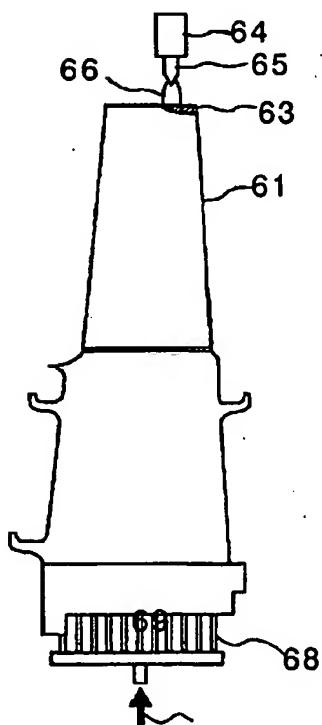


Fig.4A
Prior Art

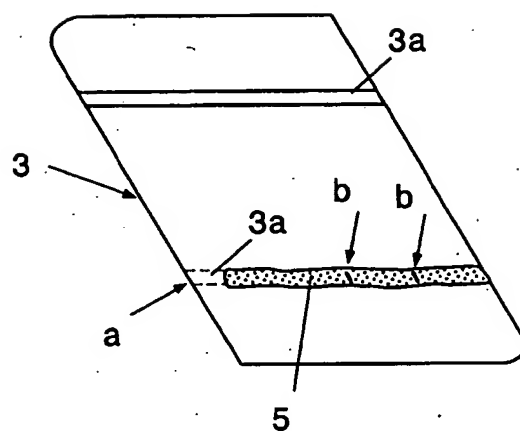


Fig.4B
Prior Art

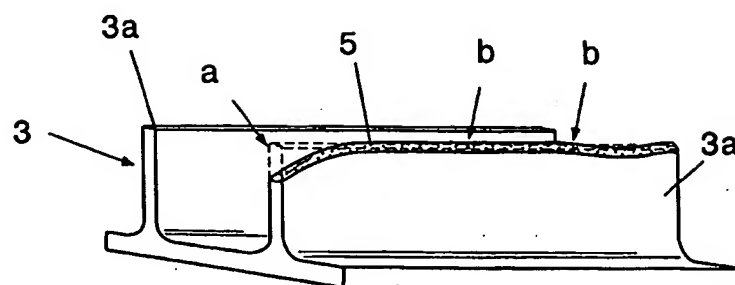


Fig.5

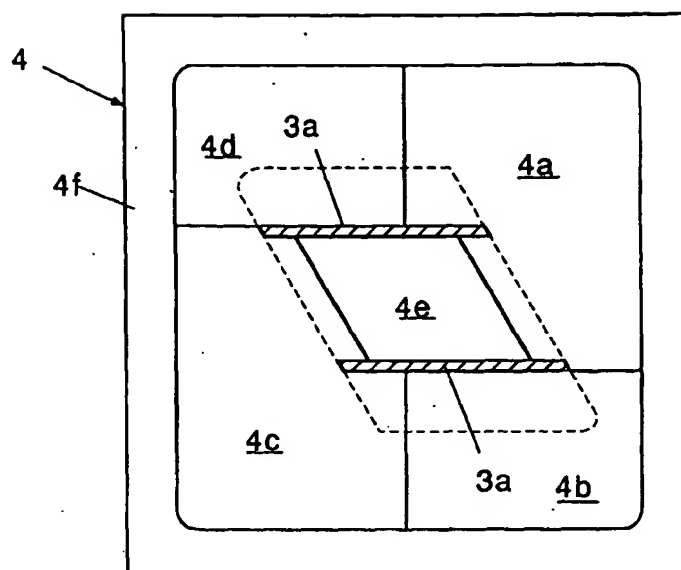


Fig.6

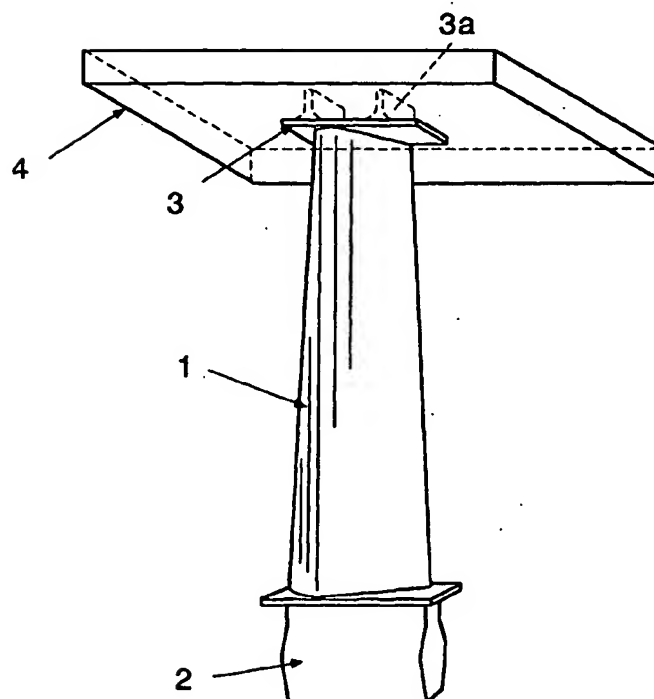


Fig.7A


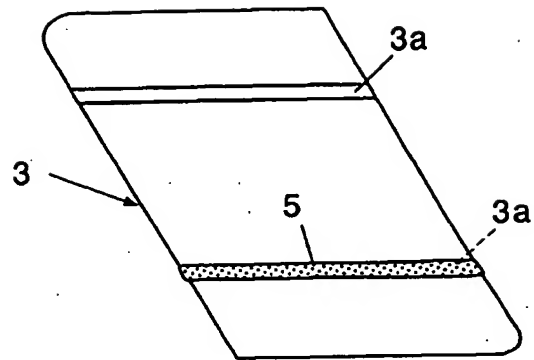


Fig.7B



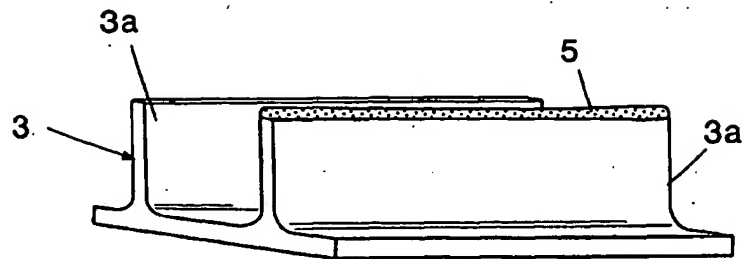

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 9773

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 4 841 117 A (KOROMZAY TIBOR) 20 June 1989 (1989-06-20) * abstract * * column 2, lines 64-67 *	1-4,6	B23K9/04 B23K9/038 B23K37/06 B23P6/04
E	EP 1 371 439 A (UNITED TECHNOLOGIES CORP) 17 December 2003 (2003-12-17) * paragraphs '0009!', '0010!', '0012!' *	1-6	
A	US 6 034 344 A (JOHNSON JEFFREY B ET AL) 7 March 2000 (2000-03-07) * column 3, lines 1-4 * * column 3, lines 39-46 *	1,4	
A	US 5 319 179 A (BIRNER WOLF ET AL) 7 June 1994 (1994-06-07) * column 1, line 66 - column 2, line 9 *	1-6	
A,D	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 10, 30 November 1995 (1995-11-30) & JP 7 171682 A (JAPAN STEEL WORKS LTD:THE), 11 July 1995 (1995-07-11) * abstract *	1-6	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B23K B23P
A	SOROKIN L I ET AL: "WELDING UP OF MARKING HOLES IN THE REPAIR OF TURBINE BLADES OF KHS26VSNK ALLOY" WELDING INTERNATIONAL, WELDING INSTITUTE. ABINGTON, GB, vol. 17, no. 1, 2003, pages 75-77, XP001159242 ISSN: 0950-7116 * column 1 *	1,5	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 6 July 2004	Examiner Jaeger, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P4C011)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 9773

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4841117	A	20-06-1989	DE 3779611 D1 EP 0276404 A1	09-07-1992 03-08-1988
EP 1371439	A	17-12-2003	US 2003226878 A1 EP 1371439 A1 JP 2004074395 A	11-12-2003 17-12-2003 11-03-2004
US 6034344	A	07-03-2000	EP 0924020 A2 JP 11218001 A SG 66497 A1	23-06-1999 10-08-1999 20-07-1999
US 5319179	A	07-06-1994	DE 4141927 A1 FR 2685234 A1 GB 2262901 A ,B IE 922923 A1 JP 3112758 B2 JP 6198438 A NL 9202128 A ,B,	24-06-1993 25-06-1993 07-07-1993 30-06-1993 27-11-2000 19-07-1994 16-07-1993
JP 7171682	A	11-07-1995	NONE	

EPO FORM P4458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82